


FOR ROADWAY AND BASE RESTORATION  
DETAILS, REFER TO THE COLLIER  
COUNTY RIGHT OF WAY HANDBOOK.

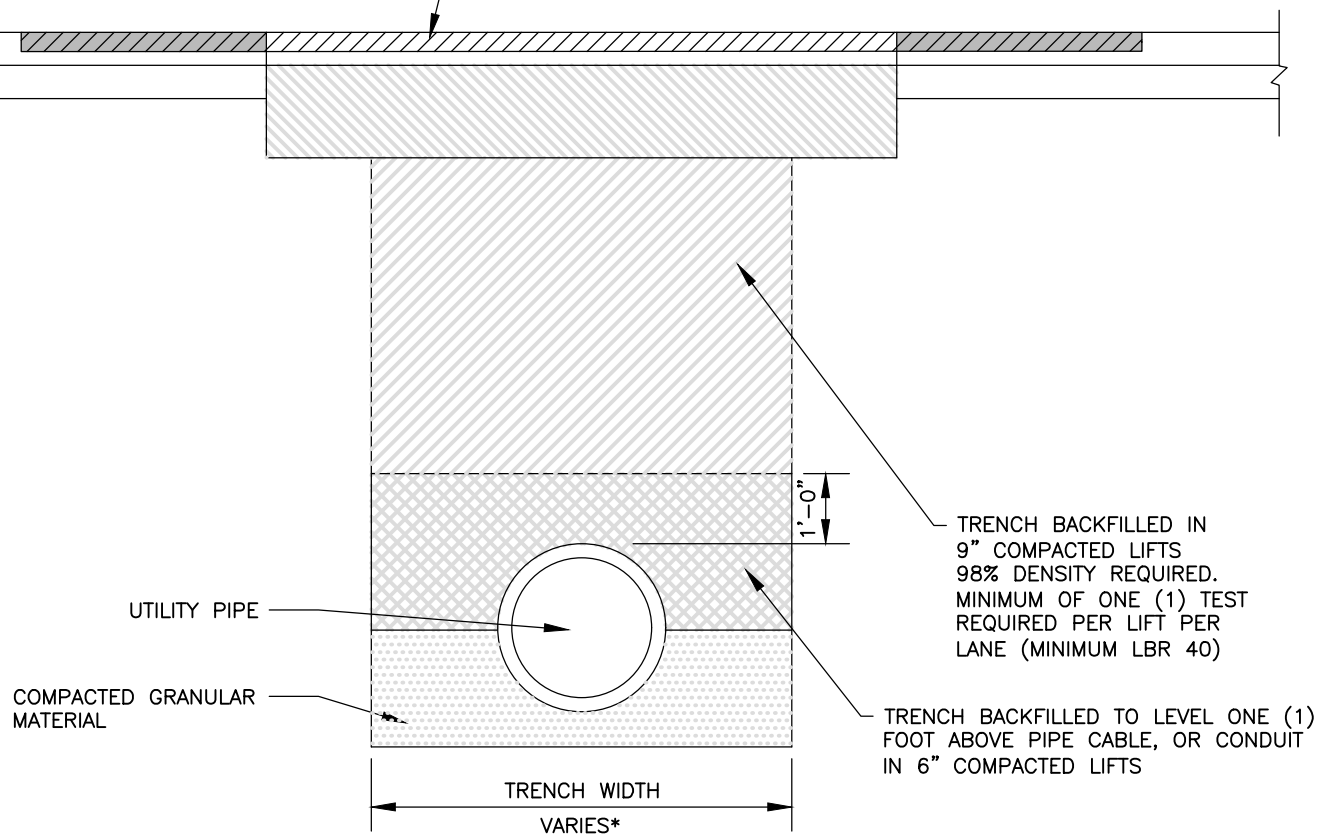

\*TRENCH WIDTH = PIPE OUTSIDE DIAMETER PLUS 2 FEET

NOTES:

1. ALL MODIFIED PROCTOR AND DENSITY TESTS SHALL BE TAKEN BY A CERTIFIED LABORATORY.
2. ALL TESTS SHALL BE COMPLETED AND SHALL MEET MINIMUM DENSITY REQUIREMENTS PRIOR TO ADDITIONAL BACKFILLING.
3. RIGHT-OF-WAY PERMIT STIPULATIONS OVERRIDE THIS DETAIL WHERE TRENCH IS LOCATED WITHIN A COUNTY RIGHT-OF-WAY.
4. ASPHALT PATCH AND TAPERS MUST BE FLUSH WITH ADJACENT ASPHALT AND CURBING.

ROAD AND TRENCH RESTORATION  
FOR LOCAL ROADS

NTS

REVISION DATE:

JULY 2018



Collier County

SHEET NO.

G-2B